



3 Port Solenoid Valve Direct Operated Poppet Type **VT307 Series** Rubber Seal



How to Order

V T 307 □ □ - **5 G** □ **1** - **01** □ □ - **F** - □

Body type

| | |
|----------|--------------|
| T | Body ported |
| O | For manifold |

Valve option

| | |
|------------|---|
| Nil | Standard type |
| E* | Continuous duty type |
| Y* | Energy-saving type |
| V* | Vacuum specification type |
| W* | Energy-saving type, Vacuum specification type |

* Semi-standard

Pressure specifications

| | |
|------------|----------------------------|
| Nil | Standard type (0.7 MPa) |
| K* | High-pressure type (1 MPa) |

* Semi-standard

Rated voltage

| Rated voltage | Valve option | | | | |
|-----------------------------|--------------|---|---|---|---|
| | Nil | E | Y | V | W |
| 1 100 VAC, 50/60 Hz | ● | ● | — | ● | — |
| 2 200 VAC, 50/60 Hz | ● | ● | — | ● | — |
| 3* 110 VAC, 50/60 Hz | ● | ● | — | ● | — |
| 4* 220 VAC, 50/60 Hz | ● | ● | — | ● | — |
| 5 24 VDC | ● | ● | ● | ● | ● |
| 6* 12 DCV | ● | ● | ● | ● | ● |
| 7* 240 VAC, 50/60 Hz | ● | ● | — | ● | — |

* Semi-standard

Electrical entry

| Grommet | DIN terminal |
|--|--|
| <p>G: 300 mm lead wire H: 600 mm lead wire</p> | <p>D: With connector</p> <p>DO: Without connector</p> |
| CE/UKCA-DC compliant AC | ● |
| | ● |

CE/UKCA-compliant

| | |
|------------|--------------------|
| Nil | None |
| Q | CE/UKCA-compliant* |

* Electrical entry and light/surge voltage suppressor: D/DO/DZ/DOZ only

Bracket

| | |
|------------|--------------|
| Nil | None |
| F | With bracket |

Thread type

| | |
|------------|------|
| Nil | Rc |
| F | G |
| N | NPT |
| T | NPTF |


Port size

| | |
|------------|-----------------------------|
| Nil | Without port (For manifold) |
| 01 | 1/8 (6A) |
| 02 | 1/4 (8A) |

Light/Surge voltage suppressor


| | |
|------------|--|
| Nil | None |
| S | With surge voltage suppressor (Grommet type only) |
| Z | With light/surge voltage suppressor (DIN terminal type only) |

With surge voltage suppressor



Surge voltage suppressor

Symbol



Manifold

| Model | Applicable manifold type | Accessories |
|-------------------|------------------------------|---|
| VO307□(-Q) | Common or individual exhaust | Function plate (DXT152-14-1A) (Note) Mounting screw (NXT013-3) |

Option

| Description | Part no. |
|-------------|---------------------------|
| Bracket | DXT152-25-1A (With screw) |



VT307 Series

Standard Specifications

| | | |
|--|-----------------------|--|
| Type of actuation | | Direct operated type 2 position single solenoid |
| Fluid | | Air |
| Operating pressure range | | 0 to 1 MPa (High-pressure type), 0 to 0.7 MPa (Standard type) |
| Ambient and fluid temperature | | -10 to 50°C (No freezing) |
| Response time ^{Note 1)} | | 20 ms or less (at 0.5 MPa) |
| Max. operating frequency | | 10 Hz |
| Lubrication | | Not required (Use turbine oil Class 1 ISO VG32, if lubricated.) |
| Manual override | | Non-locking push type |
| Mounting orientation | | Unrestricted |
| Impact/Vibration resistance ^{Note 2)} | | 150/50 m/s ² |
| Enclosure | | Dustproof |
| Electrical entry | | Grommet, DIN terminal |
| Coil rated voltage (V) | AC (50/60 Hz) | 100, 200, 110 [®] , 220 [®] , 240 [®] |
| | DC | 24, 12 [®] |
| Allowable voltage fluctuation | | -15 to +10% of rated voltage |
| Apparent power ^{Note 3) Note 4)} | AC | 12.7 VA (50 Hz), 10.7 VA (60 Hz) |
| | Inrush Holding | 7.6 VA (50 Hz), 5.4 VA (60 Hz) |
| Power consumption ^{Note 3) Note 4)} | | Without indicator light: 4 W, With indicator light: 4.2 W |
| Light/Surge voltage suppressor (DIN terminal type only) | AC | Varistor, LED |
| | DC | Diode, LED |

Flow Rate Characteristics/Weight

| Valve model | Port size | Flow rate characteristics | | | | | | | | | | | | Weight |
|--|-----------|------------------------------|------|------|------------------------------|------|------|------------------------------|------|------|------------------------------|------|------|---------|
| | | 1 → 2 (P → A) | | | 2 → 3 (A → R) | | | 3 → 2 (R → A) | | | 2 → 1 (A → P) | | | |
| | | C [dm ³ /(s·bar)] | b | Cv | C [dm ³ /(s·bar)] | b | Cv | C [dm ³ /(s·bar)] | b | Cv | C [dm ³ /(s·bar)] | b | Cv | |
| VT307 | 1/8 | 0.71 | 0.35 | 0.18 | 0.68 | 0.27 | 0.17 | 0.65 | 0.36 | 0.17 | 0.63 | 0.35 | 0.17 | 0.15 kg |
| VT307V (Vacuum spec. type) | | | | | | | | | | | | | | |
| VT307E (Continuous duty type) | | | | | | | | | | | | | | |
| VT307Y (Energy-saving type) | | | | | | | | | | | | | | |
| VT307W (Energy-saving, Vacuum spec. type) | | 0.41 | 0.26 | 0.10 | 0.44 | 0.35 | 0.11 | 0.48 | 0.27 | 0.12 | 0.35 | 0.33 | 0.10 | |
| VT307 | 1/4 | 0.71 | 0.31 | 0.19 | 0.71 | 0.25 | 0.17 | 0.68 | 0.33 | 0.17 | 0.71 | 0.26 | 0.18 | |
| VT307V (Vacuum spec. type) | | | | | | | | | | | | | | |
| VT307E (Continuous duty type) | | | | | | | | | | | | | | |
| VT307Y (Energy-saving type) | | | | | | | | | | | | | | |
| VT307W (Energy-saving, Vacuum spec. type) | | 0.49 | 0.20 | 0.12 | 0.44 | 0.34 | 0.11 | 0.48 | 0.17 | 0.12 | 0.46 | 0.28 | 0.11 | |

Note) Values for a single valve unit. It is not applicable to the manifold. Refer to the manifold specifications on page 1247.

Valve Options

Continuous duty type: VT307E

Exclusive use of VT307E is recommended for continuous duty with long time loading.

⚠ Caution

- This model is for continuous duty, not for high cycle rates.
- Energizing solenoid should be done at least once in 30 days.

Specifications different from standard are as follows.

| | |
|--------------------------------|---|
| Apparent power/AC | Inrush 7.9 VA (50 Hz), 6.2 VA (60 Hz) Holding 5.8 VA (50 Hz), 3.5 VA (60 Hz) |
| Power consumption/DC | 1.8 W, With indicator light: 2 W |
| Response time ^{Note)} | 30 ms or less (at 0.5 MPa) |

Note) Refer to Note 1) of the standard specifications.

Energy-saving type: VT307Y (VT307W)

If low power consumption is required for electronic control, "VT307Y(W)" (1.8 W) is recommended.

Specifications different from standard are as follows.

| | |
|--------------------------------|----------------------------------|
| Power consumption/DC | 1.8 W, With indicator light: 2 W |
| Response time ^{Note)} | 25 ms or less (at 0.5 MPa) |

Note) Refer to Note 1) of the standard specifications.

Vacuum spec. type: VT307V (VT307W)

This vacuum model has less air leakage than the standard model under low pressure. It is recommended for vacuum application.

⚠ Caution

Since this valve has slight air leakage, it can not be used for vacuum holding (including positive pressure holding) in the pressure container.


Specifications different from standard are as follows.

| | |
|--------------------------|-----------------------|
| Operating pressure range | -101.2 kPa to 0.1 MPa |
|--------------------------|-----------------------|



3 Port Solenoid Valve Direct Operated Poppet Type **VT307 Series**

Construction

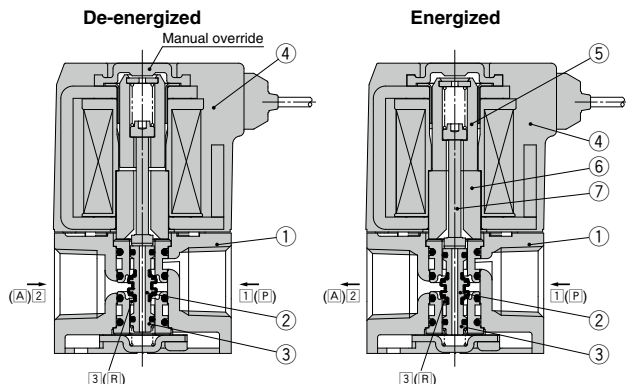

Operation principle

<De-energized>

Poppet valve (2) is pushed upward by the return spring (3), port (1) is closed. Then, port (2) and port (3) are connected.

Air flow direction:

Port (1) ↔ Block, (2) ↔ (3)

<Energized>

When energizing the molded coil (4), the armature (5) is magnetically attracted to the core (6), and through the push rod (7), it pushes down the poppet valve (2) and port (3) is closed. Then, port (1) and port (2) are connected. At this time, there will be gaps between the armature (5) and the core (6), but the armature (5) will be magnetically firmly attracted to the core (6).

Air flow direction:

Port (1) ↔ Port (2), Port (3) ↔ Block

Component Parts

| No. | Description | Material | Note |
|-----|---------------|---------------------|--------------|
| 1 | Body | Aluminum die-casted | Color: White |
| 2 | Poppet valve | Aluminum, HNBR | |
| 3 | Return spring | Stainless steel | |
| 4 | Molded coil | Resin | |

How to Use DIN Terminal

1. Disassembly

- After loosening the screw (1), then if the housing (2) is pulled in the direction of the screw (1), the connector will be removed from the body of equipment (solenoid, etc.).
- Pull the screw (1) out of the housing (2).
- On the bottom part of the terminal block (3), there's a cut-off part (9). If a small flat head screwdriver is inserted between the opening in the bottom, terminal block (3) will be removed from the housing (2).
- Remove the cable gland (4), plain washer (5) and rubber seal (6).

2. Wiring

- Pass the cable (7) through the cable gland (4), plain washer (5) and rubber seal (6) in this order, and then insert them into the housing (2).
- Loosen the screw (1) attached to the terminal block (3). Then, pass the lead wire (8) through the terminal block (3) and tighten the screw (1) again.

Note 1) Tighten within the tightening torque of 0.5 N·m ±15%.

Note 2) Cable (7) outside diameter: ø6 to ø8 mm (ø4.5 to ø7 mm for CE/UKCA-compliant products)

Note 3) Crimped terminal like round-shape or Y-shape cannot be used.

Connector for DIN Terminal, Gasket

| Description | Part no. |
|---------------|------------------------------------|
| DIN connector | B1B09-2A (Standard) |
| | GM209NJ-B17 (CE/UKCA-compliant) |
| Gasket | CAXT623-6-7-12 (Standard) |
| | CAXT623-6-7-11 (CE/UKCA-compliant) |


3. Assembly

- Pass the cable (7) through the cable gland (4), plain washer (5) and rubber seal (6) in this order and connect to the terminal block (3). Then, mount the terminal block (3) on the housing (2). (Push it down until you hear the click sound.)
- Put the rubber seal (6) and plain washer (5) in this order into the cable entry of the housing (2), and then tighten the cable gland (4) securely.
- Insert the gasket (8) between the bottom part of terminal block (3) and the plug attached to the equipment. Then, screw in (1) from the top of the housing (2) to tighten it.

Note 1) Tighten within the tightening torque of 0.5 N·m ±20%.

Changing the entry direction


The orientation of a connector can be changed 180°, depending on the combination of a housing (2) and a terminal block (3).




⚠ Caution

Light/Surge Voltage Suppressor

AC




DC



Electrical Connection

DIN terminal is connected inside as in the figure below. Connect to the corresponding power supply.

DIN terminal block



| Terminal no. | 1 | 2 |
|--------------|---|---|
| DIN terminal | + | - |

- Applicable cable O.D.
ø6 to ø8 (ø4.5 to ø7 mm for CE/UKCA-compliant products)


Lead Wire Color

| Voltage | Color |
|---------|--------------------|
| 100 VAC | Blue |
| 200 VAC | Red |
| DC | Red (+), Black (-) |
| Others | Gray |

VT307 Series


Dimensions

Grommet: VT307-□G1

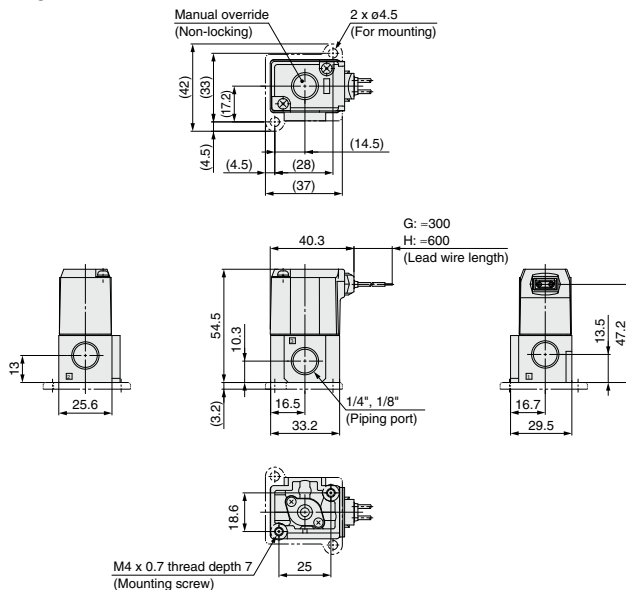

Note) There is also "VT307-□H1" (lead wire length: 600 mm).

DIN terminal: VT307-□D1

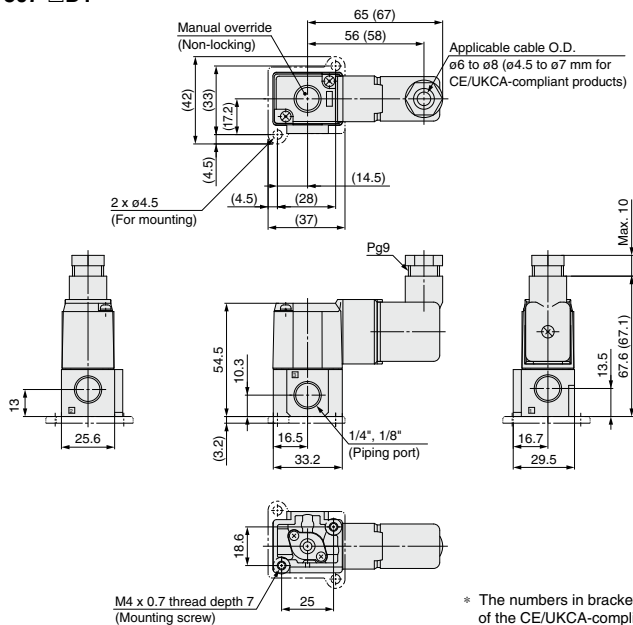

* The numbers in brackets indicate the dimensions of the CE/UKCA-compliant model (-Q).